



Power Supply 12V 5A

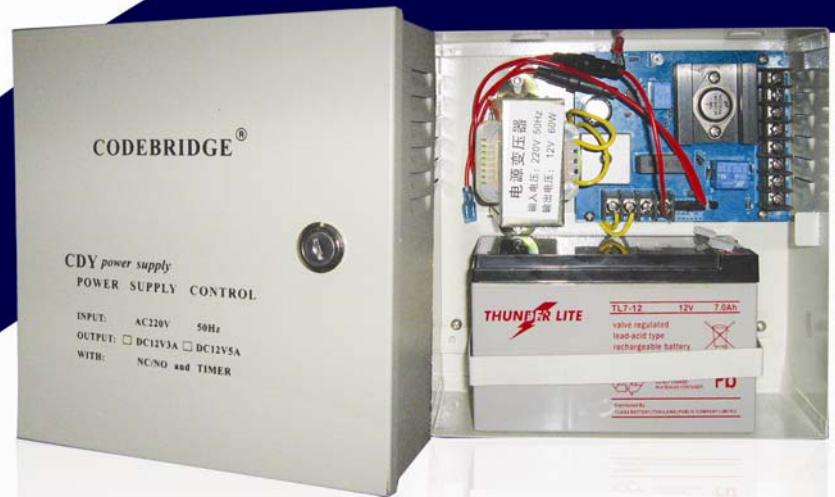

5AUPAS Power Supply Direction

1. General introduction: Be made of superior components with international hi-tech; Quality guaranteed.
2. Application: Be applied to building talkbacks and kinds of access controllers, especially electric locks and bolts.
3. Function: Power Input: standard AC200V-240V,50/60Hz;Power Output: Standard 12VDC,5A; Control electric locks or bolts directly; Reduce the load of access Controller; Save project wires; Lower potential trouble; Have output NC/NO; Has Delay control circuit; Unlock delay time is in 0-15s; Short circuit protection.
4. Dimension: (L) 215x (W) 215x (H) 78 (mm), Weight: 2.5 kg
5. Diagram:

AC 220

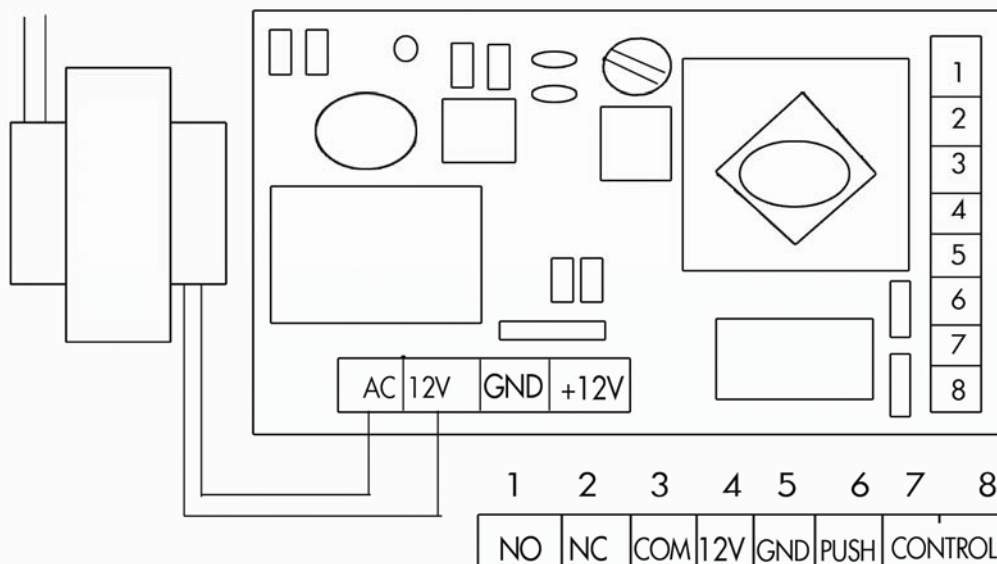

6. 1-3:NO&COM terminal,normally no output; Press button to output DC12V (0~~15s time delay);terminal 1 is+(cathode), terminal 3 is-(anode).
7. 2-3 :NC&COM terminal, normally output DC12V,press button to cut off power Supply(0~~15)s time delay), terminal 2 is + (cathode), terminal 3 is (anode).
8. 4-5 : DC 12V Output, terminal 4 is + (cathode), terminal 5 is - (anode).
9. 6-5 : Connect exit button or time attendance.
10. 7-8 : Output DC12V to open the door, especially applied to the access controller which output DC 12 V to control electric bolts or locks directly.